



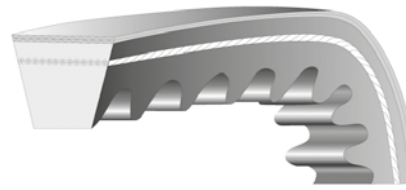

KEILRIEMEN CONTI® V „FO“ – FLANKENOFFENE SCHMALKEILRIEMEN



XPB

Beschreibung	Artikelnr.	Richt- länge Ld mm	kg		
XPB 1250	CVFOXPB1250	1250	0,231		
XPB 1270	CVFOXPB1270	1270	0,235		
XPB 1285	CVFOXPB1285	1285	0,238		
XPB 1320	CVFOXPB1320	1320	0,244		
XPB 1340	CVFOXPB1340	1340	0,248		
XPB 1350	CVFOXPB1350	1350	0,250		
XPB 1360	CVFOXPB1360	1360	0,252		
XPB 1400	CVFOXPB1400	1400	0,259		
XPB 1410	CVFOXPB1410	1410	0,261		
XPB 1440	CVFOXPB1440	1440	0,267		
XPB 1450	CVFOXPB1450	1450	0,268		
XPB 1470	CVFOXPB1470	1470	0,272		
XPB 1500	CVFOXPB1500	1500	0,278		
XPB 1510	CVFOXPB1510	1510	0,280		
XPB 1525	CVFOXPB1525	1525	0,282		
XPB 1550	CVFOXPB1550	1550	0,287		
XPB 1590	CVFOXPB1590	1590	0,294		
XPB 1600	CVFOXPB1600	1600	0,296		
XPB 1640	CVFOXPB1640	1640	0,304		
XPB 1650	CVFOXPB1650	1650	0,305		
XPB 1690	CVFOXPB1690	1690	0,313		
XPB 1700	CVFOXPB1700	1700	0,315		
XPB 1750	CVFOXPB1750	1750	0,324		
XPB 1780	CVFOXPB1780	1780	0,329		
XPB 1800	CVFOXPB1800	1800	0,333		
XPB 1850	CVFOXPB1850	1850	0,342		
XPB 1900	CVFOXPB1900	1900	0,352		
XPB 1950	CVFOXPB1950	1950	0,361		
XPB 2000	CVFOXPB2000	2000	0,370		
XPB 2020	CVFOXPB2020	2020	0,374		
XPB 2060	CVFOXPB2060	2060	0,381		
XPB 2120	CVFOXPB2120	2120	0,392		
XPB 2150	CVFOXPB2150	2150	0,398		
XPB 2180	CVFOXPB2180	2180	0,403		
XPB 2240	CVFOXPB2240	2240	0,414		
XPB 2285	CVFOXPB2285	2285	0,423		
XPB 2300	CVFOXPB2300	2300	0,426		
XPB 2360	CVFOXPB2360	2360	0,437		
XPB 2410	CVFOXPB2410	2410	0,446		
XPB 2430	CVFOXPB2430	2430	0,450		
XPB 2450	CVFOXPB2450	2450	0,453		
XPB 2500	CVFOXPB2500	2500	0,462		
XPB 2530	CVFOXPB2530	2530	0,468		
XPB 2650	CVFOXPB2650	2650	0,490		
XPB 2680	CVFOXPB2680	2680	0,496		
XPB 2730	CVFOXPB2730	2730	0,505		
XPB 2800	CVFOXPB2800	2800	0,518		
XPB 2840	CVFOXPB2840	2840	0,525		
XPB 2900	CVFOXPB2900	2900	0,536		