




ROLLENKETTEN DIN 8187 – EUROPÄISCHER STANDARD MIT GERADEN LASCHEN „SATURN“

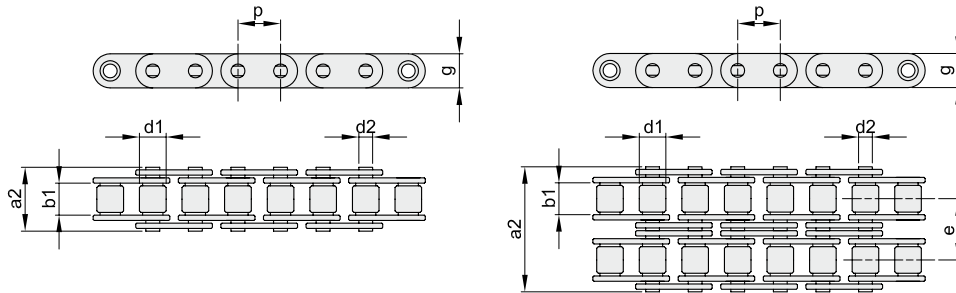

Ketten gefertigt nach ISO 9001

Ketten vorgereckt
5 Meter VPE



EINFACH

ISO	Artikelnr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min KN	q kg/m ≈
		mm	inch							
08B-1	701112000	12,7	1/2"	7,75	4,45	8,51	17,0	11,8	18,0	0,75
10B-1	701115000	15,875	5/8"	9,65	5,08	10,16	19,6	14,7	22,4	0,98
12B-1	701119000	19,05	3/4"	11,68	5,72	12,07	22,7	16,0	29,0	1,24
16B-1	701125000	25,4	1"	17,02	8,28	15,88	36,1	21,0	60,0	3,30

ZWEIFACH

ISO	Artikelnr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min KN	q kg/m ≈
		mm	inch								
10B-2	701115200	15,875	5/8"	9,65	5,08	10,16	36,1	14,7	16,59	44,5	1,97
12B-2	701119200	19,05	3/4"	11,68	5,72	12,07	42,0	16,0	19,46	57,8	2,27
16B-2	701125200	25,4	1"	17,02	8,28	15,88	68,0	21,0	31,88	106,0	5,78